

2011.0 RANGE ROVER SPORT (LS), 303-14

ELECTRONIC ENGINE CONTROLS - V8 S/C 5.0L PETROL

MANIFOLD ABSOLUTE PRESSURE (MAP) SENSOR (G1246355)

REMOVAL AND INSTALLATION

18.30.56	SENSOR - MANIFOLD AIR PRESSURE - RENEW	3000 CC, TDV6	0.1	USED WITHINS	
18.30.56	SENSOR - MANIFOLD AIR PRESSURE - RENEW	5000 CC, AJ V8, NATURALLY ASPIRATED	0.3	USED WITHINS	
18.30.56	SENSOR - MANIFOLD AIR PRESSURE - RENEW	5000 CC, AJ V8, SUPERCHARGED	0.8	USED WITHINS	
18.30.56	SENSOR - MANIFOLD AIR PRESSURE - RENEW	AJ V8, NATURALLY ASPIRATED	0.5	USED WITHINS	

REMOVAL

 **NOTE:**

Removal steps in this procedure may contain installation details.

1.

 **WARNING:**


Make sure to support the vehicle with axle stands.

Raise and support the vehicle.

2.

Refer to: Cooling System Partial Draining and Vacuum Filling (303-03C, General Procedures).

3.

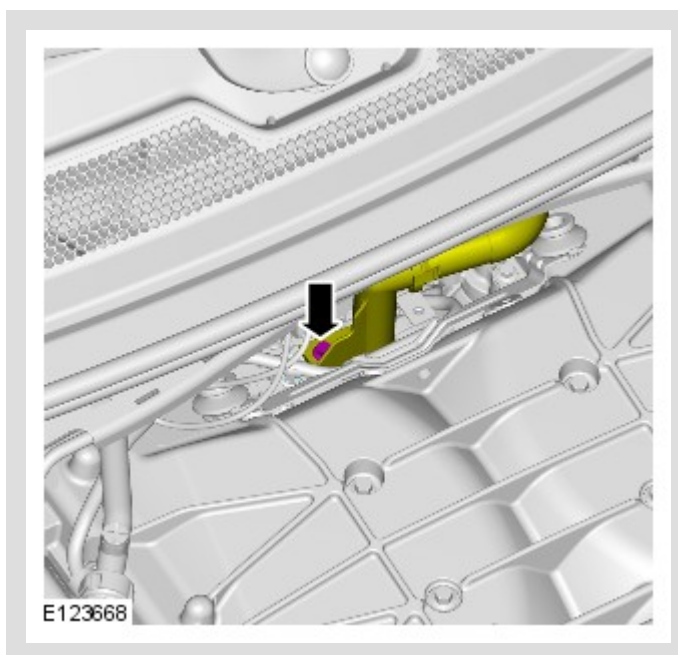


Torque: 10 Nm

4.

 **NOTE:**


Some variation in the illustrations may occur, but the essential information is always correct.

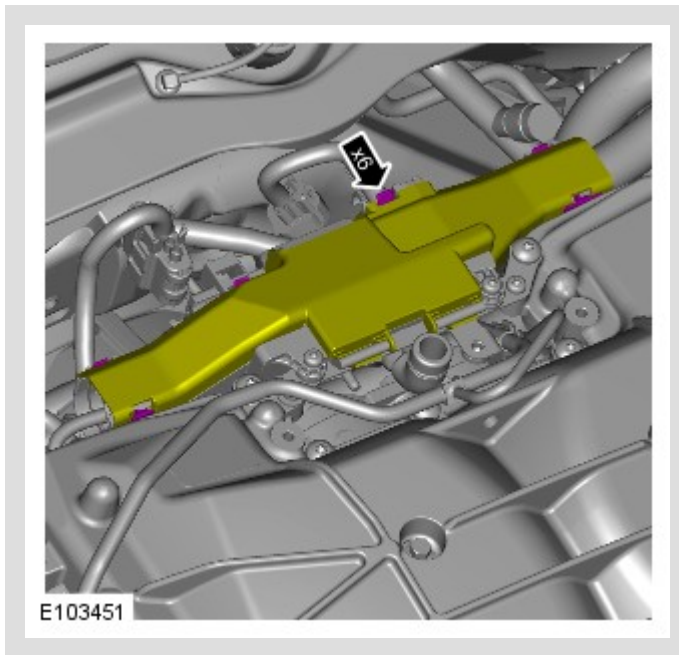

5.

 **NOTE:**

Some variation in the illustrations may occur, but the essential information is always correct.

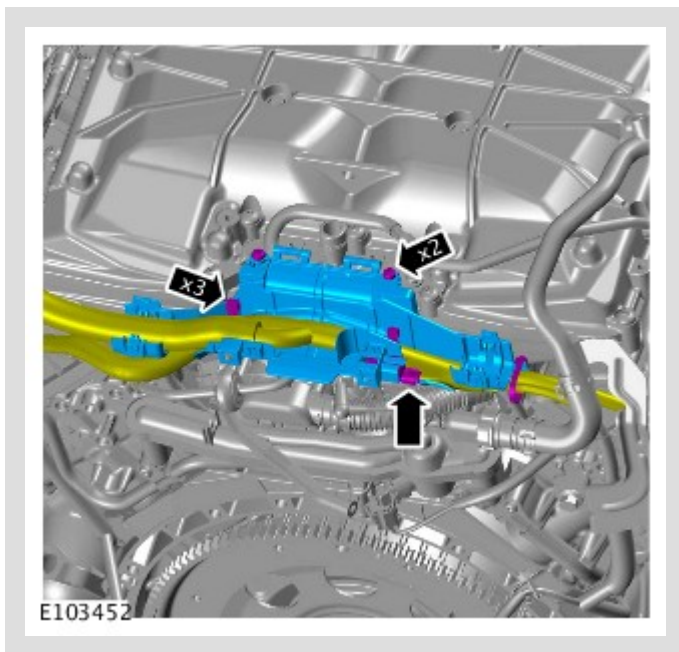


Torque: 10 Nm

6.

 NOTE:


Some variation in the illustrations may occur, but the essential information is always correct.

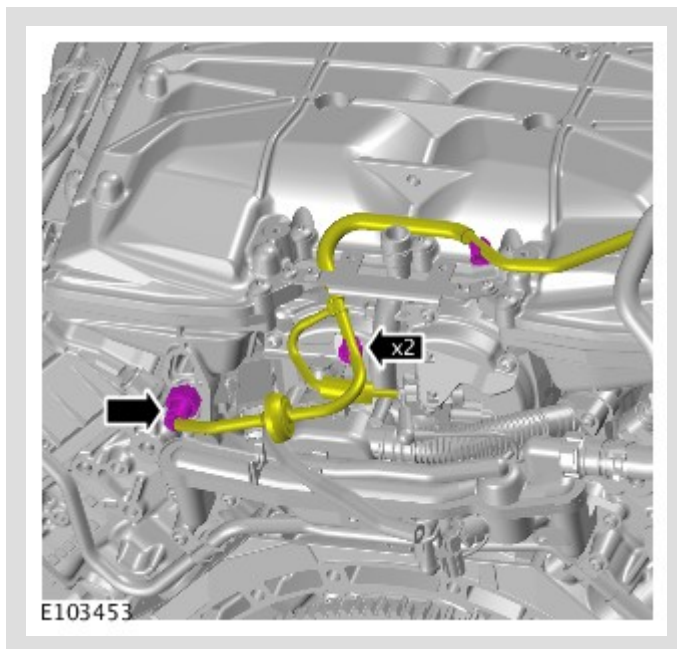

7.

 NOTE:

Some variation in the illustrations may occur, but the essential information is always correct.

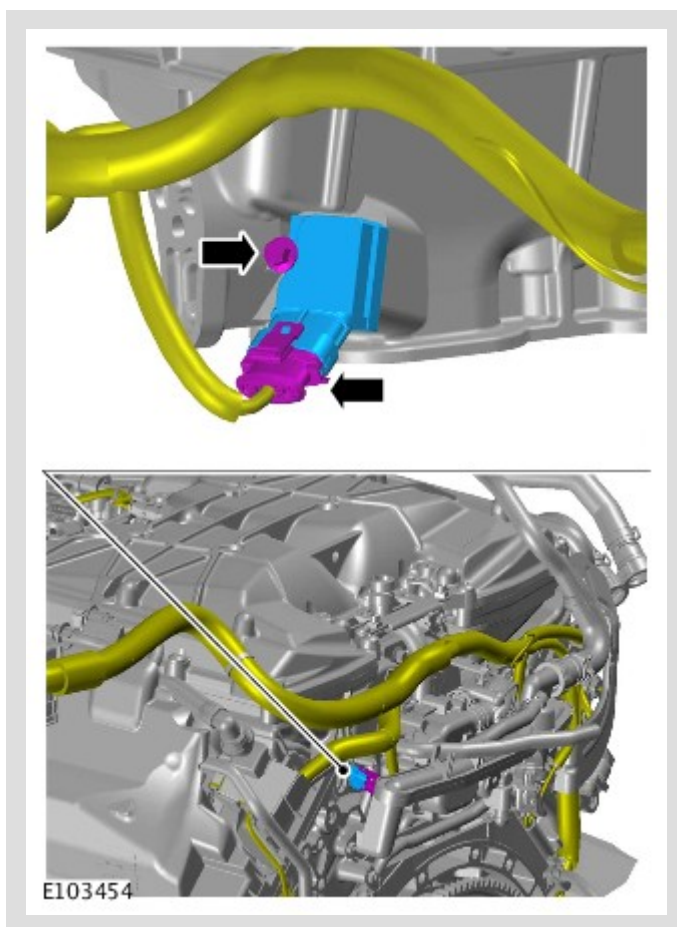

Torque: 5 Nm

INSTALLATION

1. To install, reverse the removal procedure.

